



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #140
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 868MHz
Model: RFM23BP-868S2(10dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3V
Date: 2013/11/18
Time: 16:35:40
Engineer Signature: PEI
Distance: 3m

Note:

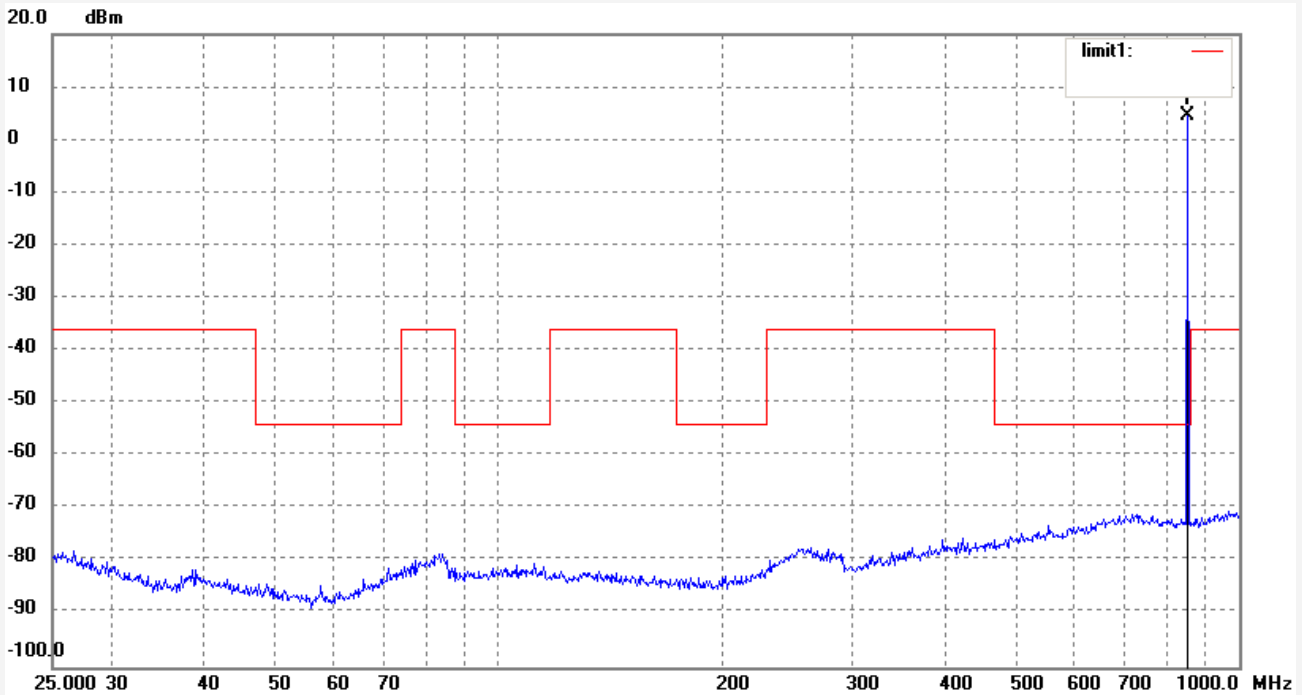

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	868.0000	-3.62	8.09	4.47	-54.00	58.47	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #141
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 868MHz
Model: RFM23BP-868S2(10dBm)
Manufacturer:

Polarization: Horizontal
Power Source: DC 3V
Date: 2013/11/18
Time: 16:36:47
Engineer Signature: PEI
Distance: 3m

Note:

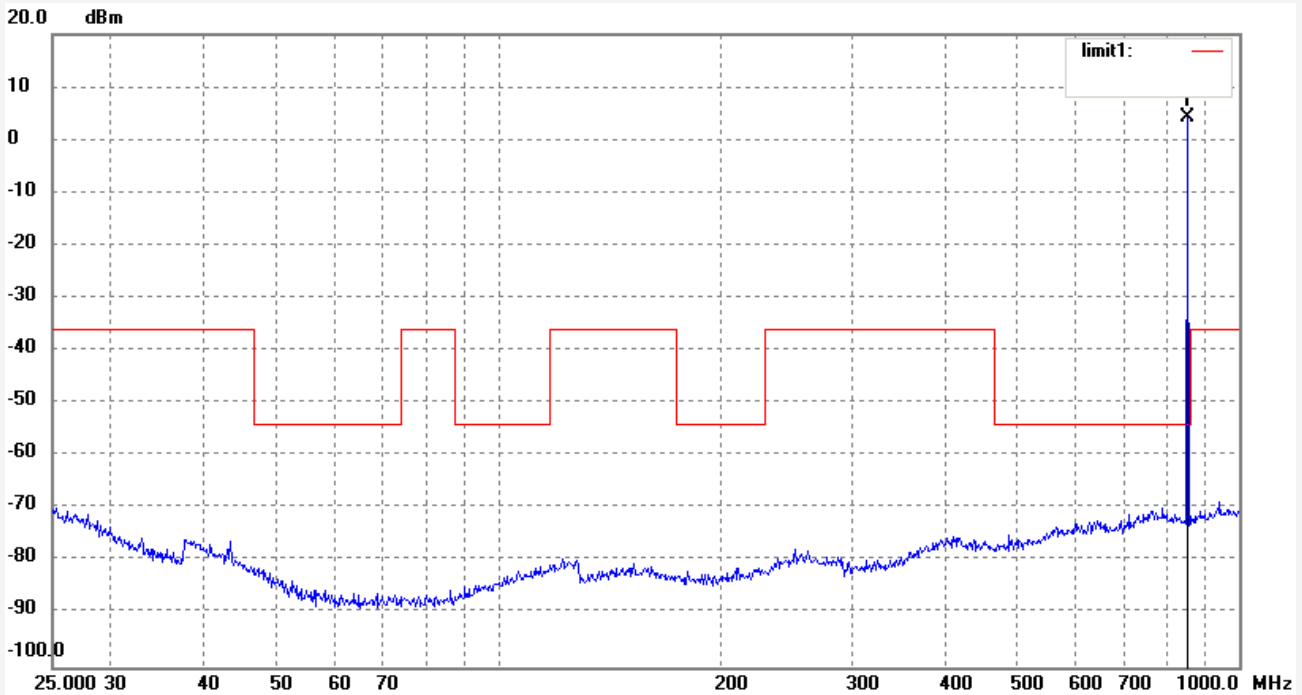

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	868.0000	-3.61	7.89	4.28	-54.00	58.28	peak			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #142	Polarization: Horizontal
Standard: EN300 220(TX)	Power Source: DC 3V
Test item: Radiation Test	Date: 2013/11/18
Temp.(C)/Hum.(%) 23 C / 48 %	Time: 16:43:44
EUT:	Engineer Signature: PEI
Mode: TX 868MHz	Distance: 3m
Model: RFM23BP-868S2(10dBm)	
Manufacturer:	

Note:

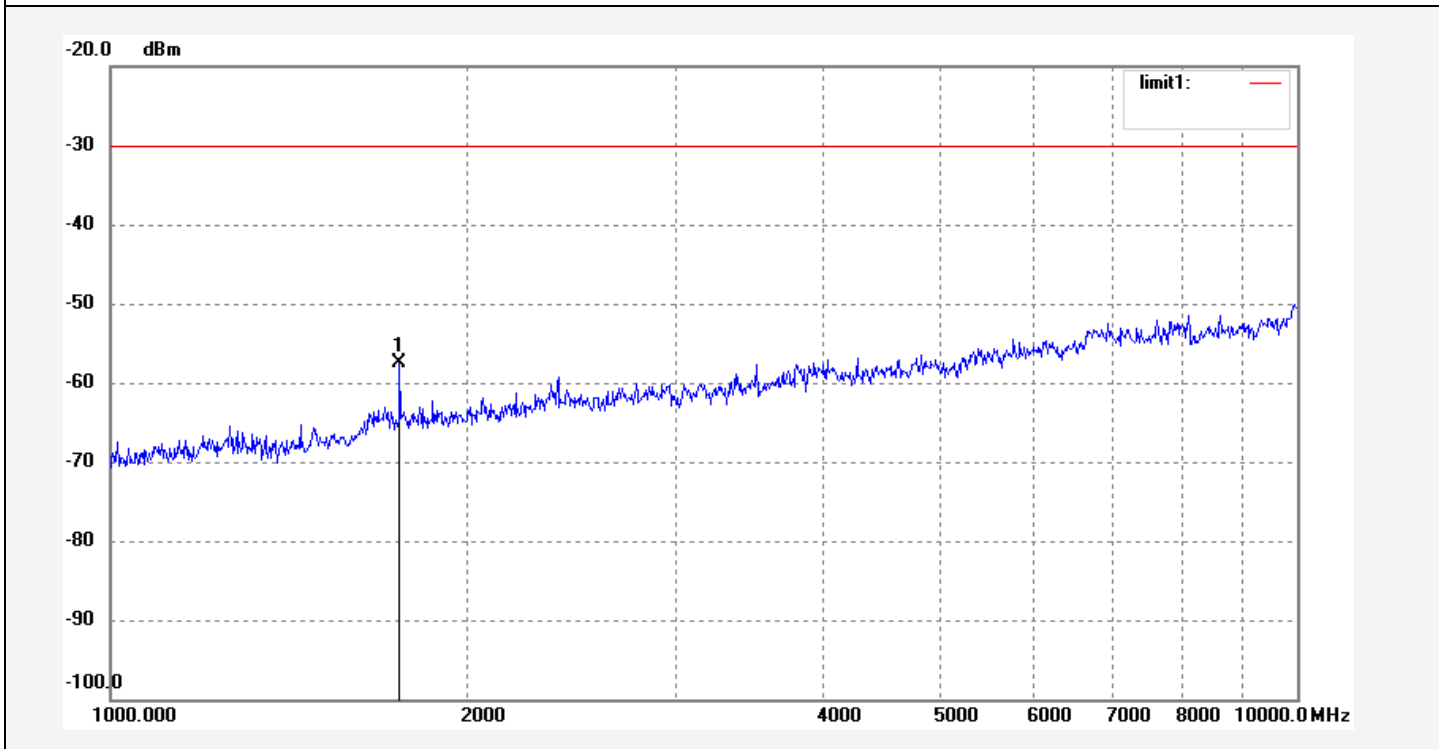

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1736.00	-57.47	0.05	-57.42	-30.00	-27.42	peak			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: HP #143
Standard: EN300 220(TX)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT:
Mode: TX 868MHz
Model: RFM23BP-868S2(10dBm)
Manufacturer:

Polarization: Vertical
Power Source: DC 3V
Date: 2013/11/18
Time: 16:45:09
Engineer Signature: PEI
Distance: 3m

Note:

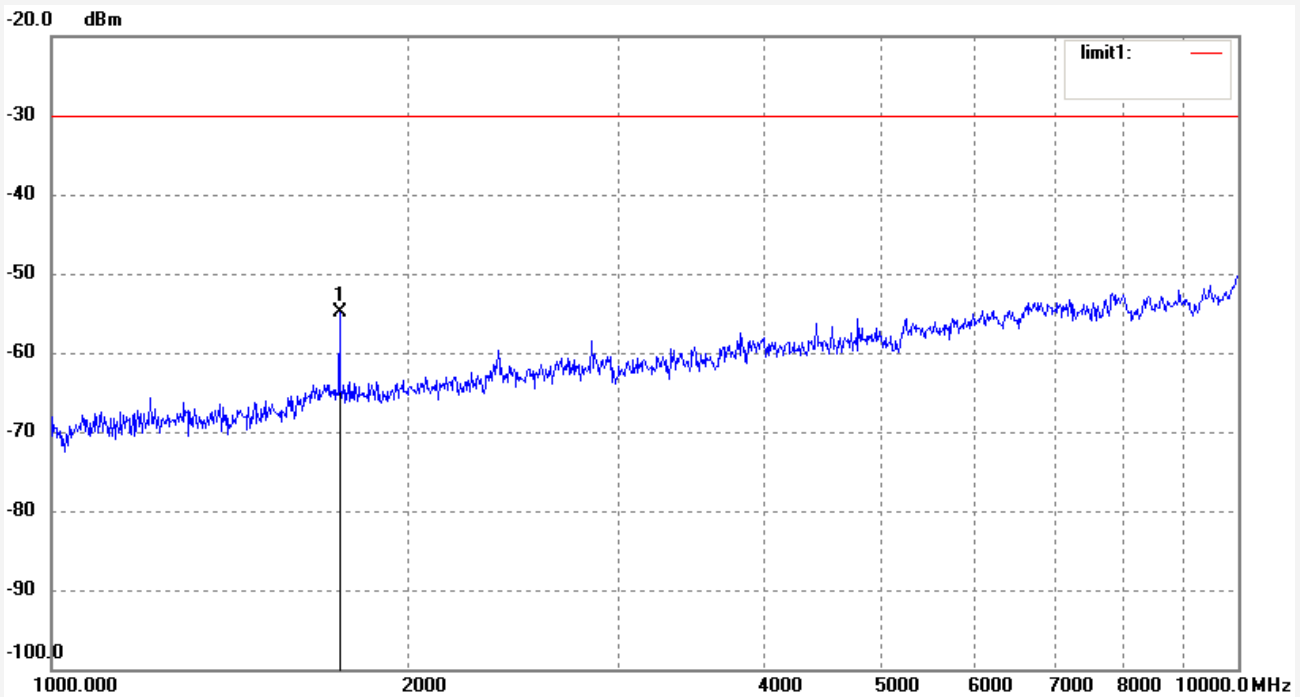

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1736.00	-55.07	0.09	-54.98	-30.00	-24.98	peak			